




PUMPS

Quiet running single-stage centrifugal pumps, complete with prefilter Material

- .Pump body, seal mounting, pump foot and Diffuser in glass loaded polypropylene
- .Impeller in PPO
- .Motor shaft in stainless steel AISI-420
- .Mechanical seal in graphite and stealite Motor housing in aluminium L-2521 Motor
- .Asynchronous two poles
- .IP 55 protection
- .Class F insulation
- .Continuous operation
- .Single phase version built-in thermal protection



| code | MODEL NO. | QMAX(L/MIN) | HMAX(H) | KW | HP | PHASE | CONNECTION SIZE |
|--------|-----------|-------------|---------|------|------|--------|-----------------|
| 980601 | PP-01 | 180 | 9.0 | 0.35 | 0.5 | SINGLE | 1.5 INCH/50 MM |
| 980602 | PP-02 | 200 | 11.0 | 0.55 | 0.75 | SINGLE | 1.5 INCH/50 MM |
| 980603 | PP-03 | 260 | 14.5 | 0.75 | 1.0 | SINGLE | 1.5 INCH/50 MM |
| 980604 | PP-04 | 370 | 16.5 | 1.1 | 1.5 | SINGLE | 2.0 INCH/63 MM |
| 980605 | PP-05 | 410 | 18.0 | 1.5 | 2.0 | SINGLE | 2.0 INCH/63 MM |
| 980606 | PP-06 | 580 | 19.5 | 2.2 | 3.0 | SINGLE | 2.0 INCH/63 MM |
| 980607 | PP-07 | 580 | 15.0 | 2.2 | 3.0 | THREE | 2.0 INCH/63 MM |

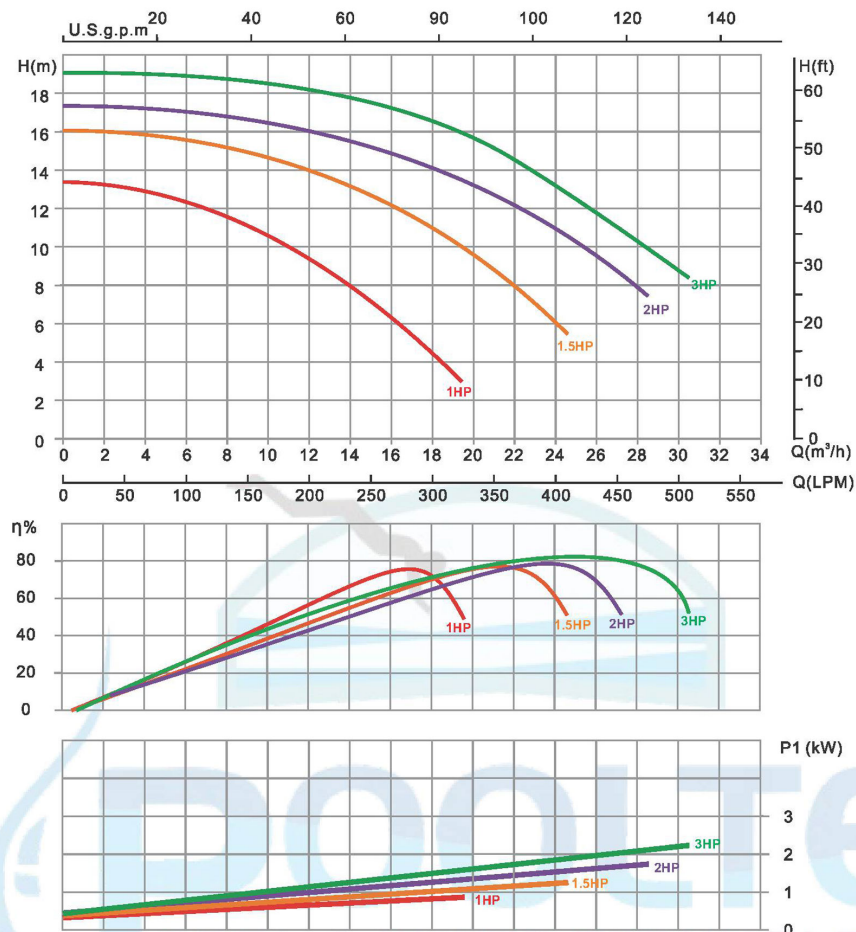

Remarks: Flow curve information based on 220V/50Hz and 380V/50Hz motor.



| code | MODEL NO. | QMAX(L/MIN) | HMAX(H) | KW | HP | PHASE | CONNECTION SIZE |
|--------|-----------|-------------|---------|-----|-----|-------|-----------------|
| 980608 | PP-08 | 800 | 16.0 | 3.0 | 4.0 | THREE | 3.0 INCH/90 MM |
| 980609 | PP-09 | 1500 | 18.5 | 4.0 | 5.5 | THREE | 3.0 INCH/90 MM |
| 980610 | PP-10 | 2000 | 22.5 | 5.5 | 7.5 | THREE | 3.0 INCH/90 MM |
| 980611 | PP-11 | 2300 | 24 | 7.5 | 10 | THREE | 4.0 INCH/110 MM |